WELLINGTON ARCHITECTURAL



COORAN PANEL


Wellington Architectural's Cooran Panel is a decorative timber lining board. Named after the Aboriginal word meaning tall trees, this panel was first used on a new aboriginal community health facility. The repitition of the design and natural timber finish will create a feature of any wall.

Panel Features:

- PEFC and FSC Certified timber
- Easy to install
- · Custom lengths (to reduce waste)
- Internal or external use (depending on timber species and finish)

The Cooran Panel features a hidden tongue and groove system which provide a seamless finish with fast installation and reduced waste.



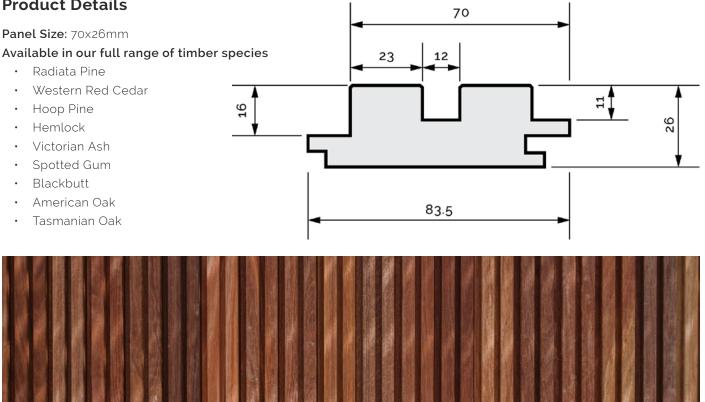

Please contact us if you have any questions or would like a quote for your next project.

P; 02 6280 8496 E: info@wellingtonarchitectural.com www.wellingtonarchitectural.com

Product Details



TIMBER SPECIES GUIDE

Wellington Architectural timber species guide is aimed to assist architects, builders and contractors to determine the right timber to suit your project.

		Seasoned Density	Shrinkage	Hardwood or Softwood	Durability Above Ground	Application
Pint	diata Pine <i>us radiata</i> ite to Pale Yellow	550kg/m³	Medium	Softwood	Low (0-7 years)	Interior Exterior (if treated)
Thu Pale	estern Red Cedar <i>ija plicata</i> e Brown to Pink Brown e wood darker	350kg/m³	Very Low	Softwood	Reasonably High (15-40 years)	Interior Exterior
Arau	oop Pine ucaria cunninghamii e cream to light yellow	550kg/m³	Low	Softwood	Low (0-7 years)	Interior Exterior (if treated)
Tsug	mlock ga heterophylla e cream	500kg/m³	Medium	Softwood	Low (0-7 years)	Interior
Euc	ctorian Ash <i>alyptus regnans</i> e pink to yellowish wn	660kg/m³	Very High	Hardwood	Moderate (7-15 years)	Interior
	otted Gum <i>ymbia maculata</i> ht brown to deep -brown hues	1100kg/m ³	Medium	Hardwood	High (+40 years)	Interior Exterior
Gol	ackbutt <i>alyptus pilularis</i> den yellow to pale wn occasional pink hues	900kg/m³	High	Hardwood	High (+40 years)	Interior Exterior
Que	nerican Oak arcus alba ht to dark brown	750kg/m³	Very High	Hardwood	Moderate (7-15 years)	Interior

*All timber species above have a Fire Properties Group Number of 3 (slightly combustible)



